


WE PUT EVERYTHING WITHIN REACH.

Installation Guide

40230

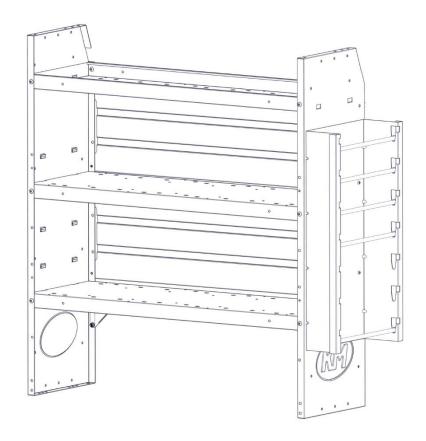

Kargo Master Rancho Cordova, CA 95742 800-343-7486 CustomerService@KargoMaster.com

DATE:



PLEASE READ ALL INSTRUCTIONS AND WARNINGS PRIOR TO ASSEMBLING, INSTALLING, AND USING THIS PRODUCT

Warning



Always check for wires, fuel tanks and lines, brake lines and other important vehicle functionality items prior to drilling and installing all products.

Tools Needed

5/32" Allen Hex	7/16" Wrench and Socket
1/4" Drill (optional)	

Table of Contents

Parts List	2
Hardware List	2
Step 1 Find Location	3
Step 2 Attach	3-4

Before You Begin

- Read all instructions.
- ENSURE SAFETY PRIOR TO DRILLING.
- Product can be installed on virtually any sheet metal product.



<u>Parts</u>

ITEM NO.		PART NUMBER	DESCRIPTION	QTY.
A		40230-00-001	Reel Base	1
В	0	40230-10	Reel Bar ASM	5
		18-40230	Hardware Kit	1

Hardware

ITEM NO.	TO SCALE	DESCRIPTION	PART NUMBER	QTY.
1		.25-20 x .50 BHCS	91306A375	4
2		.25 Flat Washer	90126A029	4
3		.25-20 Nyloc	95615A120	4

Step 1 – Find Location

ARGO NASTER


Step 2 – Attach


- Find desired location for wire wheel holder to be installed.
- On the side of most KargoMaster shelf units, holes can be found that correspond with holes from the wire wheel holder.
- Place reel base (A) in desired location, if holes do <u>NOT</u> align, mark hole locations and drill with 1/4" drill.
- One can place wire wheel holder in any desired location.


Bolt together using a 1/4" x 1/2" button head cap

screw (1) on the reel base (A) side.

• On the attachment side, bolt together using a 1/4" flat washer (2) and a 1/4" nyloc nut (3).

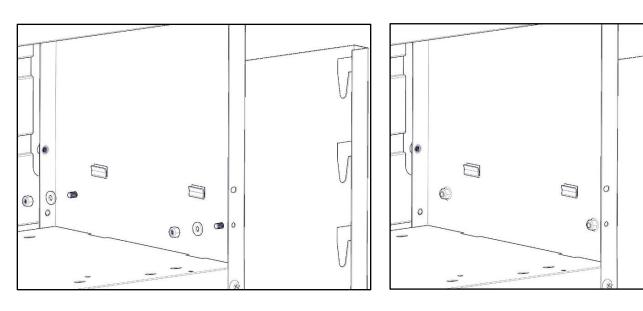









•

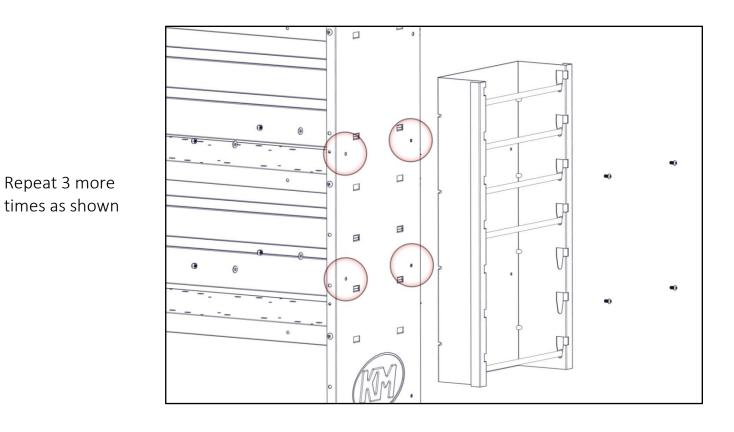

• Place reel bars (B) in desired locations.

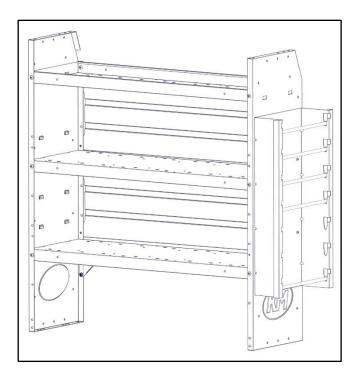

Ensure all bolts are tight. Your Installation is now complete.